


Product Information

ZHV30 Vickers Hardness Tester - from manual to fully automatic

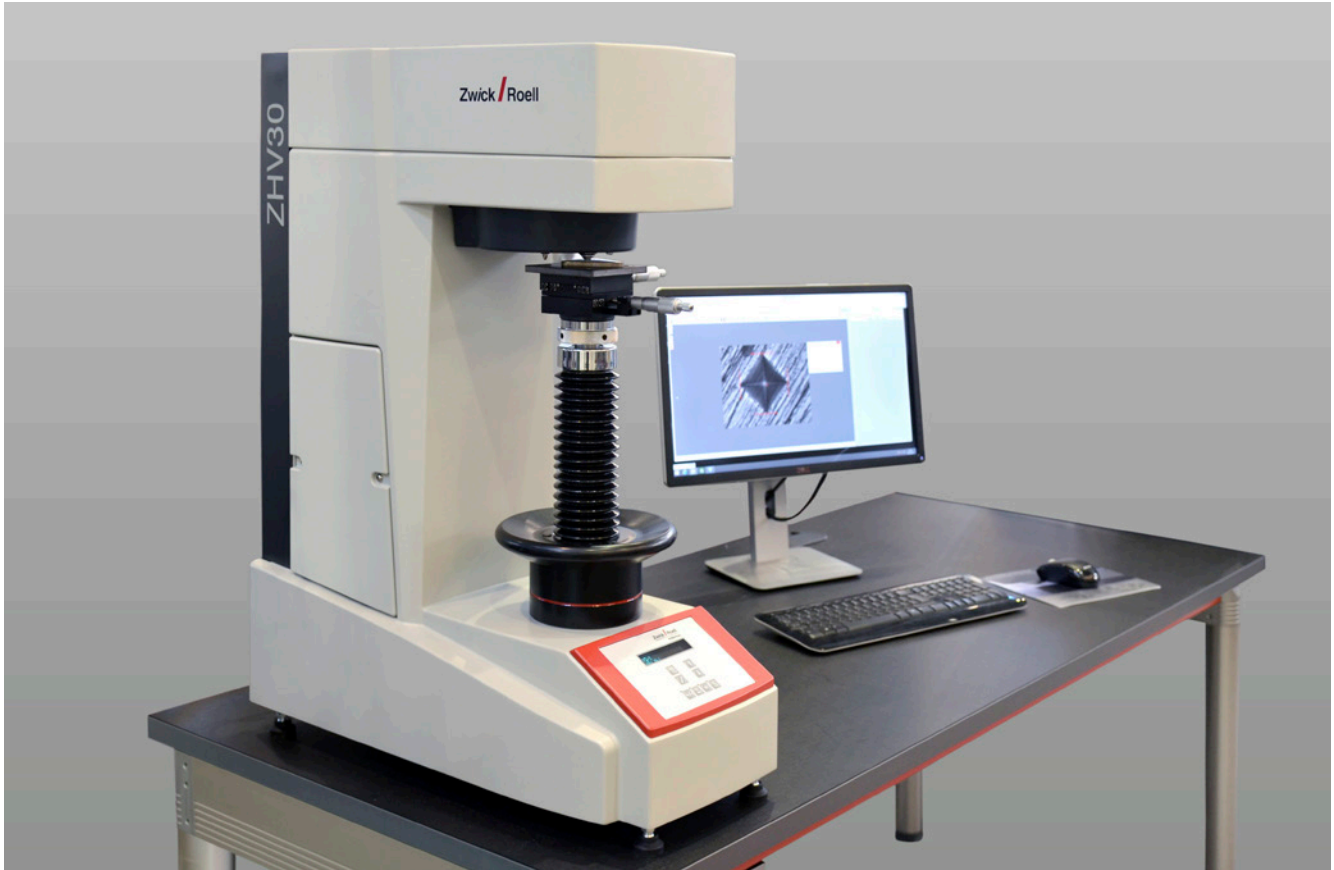

Range of application

Can be used for the optical hardness test methods Micro and Macro Vickers, Knoop and Brinell to the following standards:

- **Vickers** hardness acc. to ISO 6507, ASTM E92 and ASTM E384
- **Knoop** hardness acc. to ISO 4545 and ASTM E384
- **Brinell** hardness acc. to ISO 6506 and ASTM E10

Advantages/features

- Load steps with motorised load change: 0.2, 0.5, 1, 3, 5, 10, 30 (kgf)
- Motorised turret allows automatic test sequence when changing indenter and lens position
- Capable of fitting one indenter and up to four objective lenses simultaneously
- Dead weight load application, provides long term test force stability and repeatability
- Variable dwell times, 5 ... 60 seconds
- Individual setting of illumination for each objective lens

Software controlled variants for **semi- to fully automatic hardness testing systems** provide the further features:

- Operation and control of the hardness tester via High Definition software (HD)
- 1.3 megapixel USB camera
- High-resolution overview image of specimen surface via scan function (stitching) ⁽¹⁾ with 2.5 x objective lens
- Easy positioning of test points in the overview image
- Automatic indentation measurement with illumination and shadow correction removes operator influence in determining hardness values
- Motorised x-y table with 100 mm x 60 mm travel
- Automatic effective case depth determination

⁽¹⁾ Function not available in the US

Product Information

ZHV30 Vickers Hardness Tester - from manual to fully automatic

High Definition Testing Software

When a hardness testing solution which delivers reliable, accurate and repeatable test results is needed, choose from the HD line of macro and micro hardness testing solutions - field-proven systems, offering beyond comparison capabilities and fully ASTM E 384, ISO 6507 and ISO 4545-compliant.

Precise positioning

With its image of the entire specimen (Mosaics) and its annotation tools, HD Software enables you to position indents precisely where they are required.

Precise, reproducible measurements


The high image resolution of the HD Software allows measurement of indents to be precise and reproducible.

Enhanced productivity

The HD Software combines ease of use, reliability and auto-calibration, minimizing the subjectively associated with human intervention. The system can run autonomous for hours without interruption.

Sophisticated reporting

The results are automatically transferred via data interface from HD software to testXpert III - the testing software for all Zwick testing machines and instruments. According to your requirements the reports are now generated.

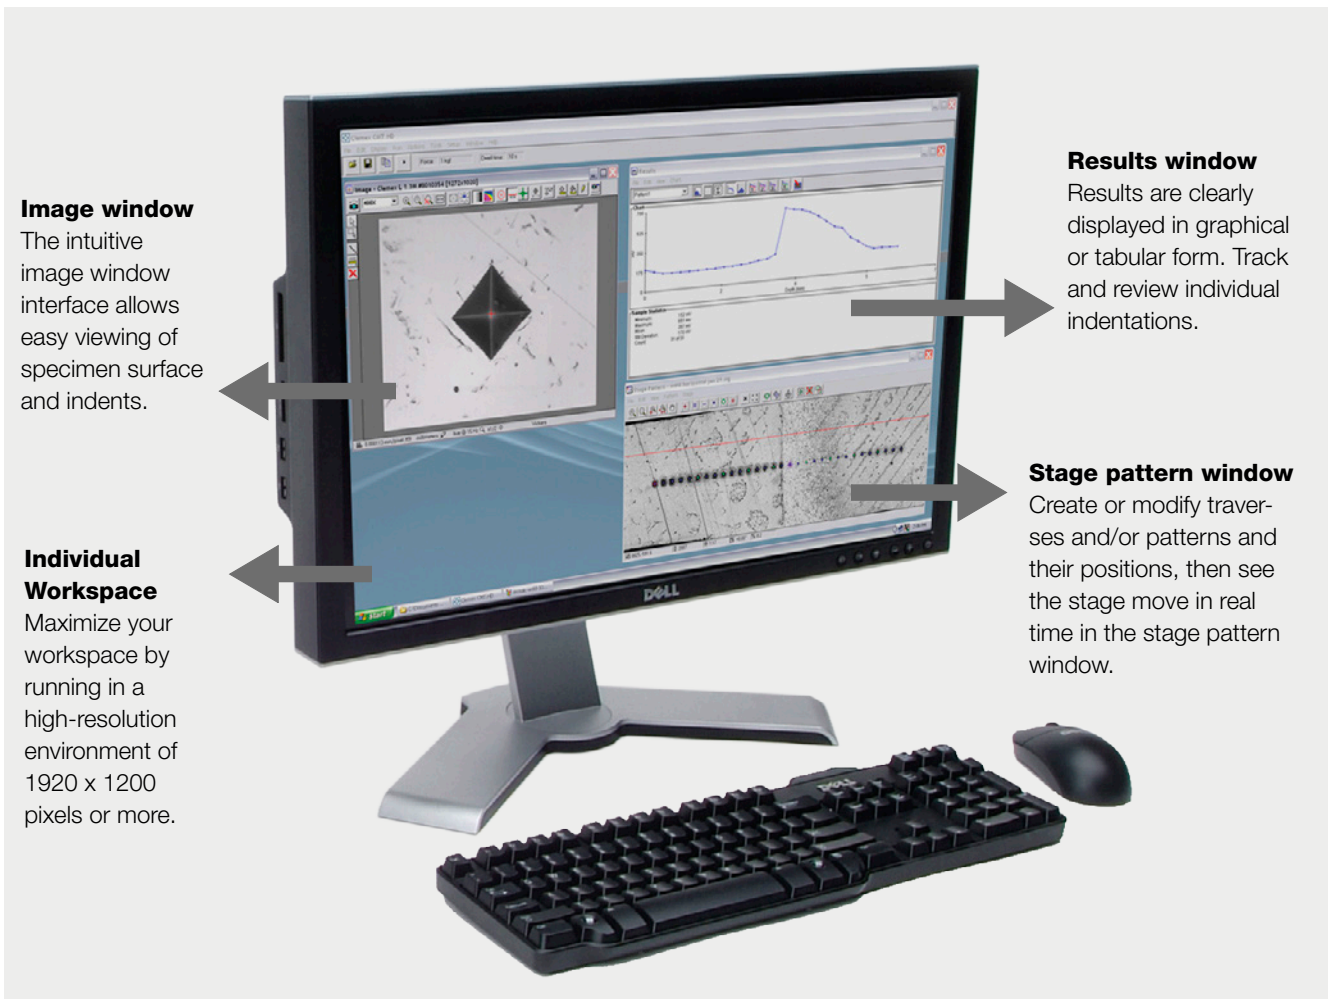


Product Information


ZHV30 Vickers Hardness Tester - from manual to fully automatic

Step 1: Set the entire specimen

Place the specimen in the specimen holder and - with one click - build a mosaic image of the specimen and set reference points for more traverses using annotated tools.

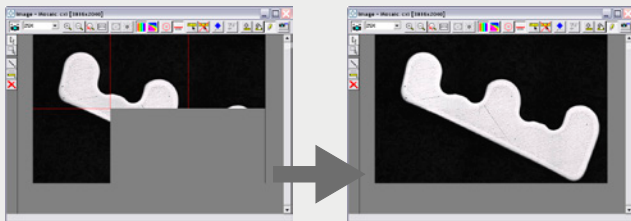

Building mosaic image to a complete image

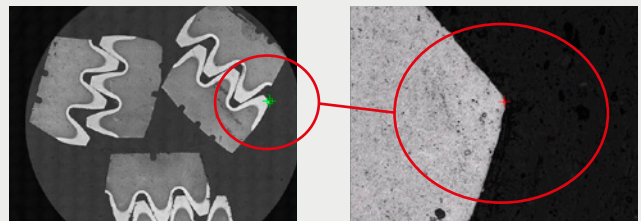

Precise positioning at any magnification

Step 2: Set-up traverses/patterns


Open, modify, or create new traverses/patterns using reference points or lines. Traverses and patterns can be individually adjusted.




T-Bar rotation tool



Three traverses perpendicular to edge

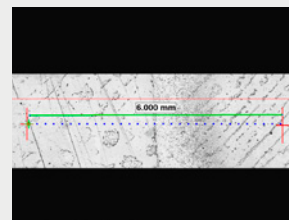


Traverse centred in weld sample

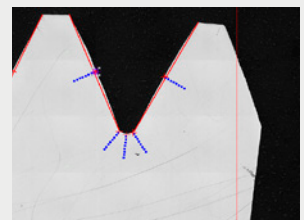


Five traverses perpendicular to the edge of the gear

Step 3: Click & walk away


HD Software intelligently follows the predefined patterns, indents the specimen, focuses if needed, measures and generates data dynamically. Everything is automated, freeing users for other tasks.

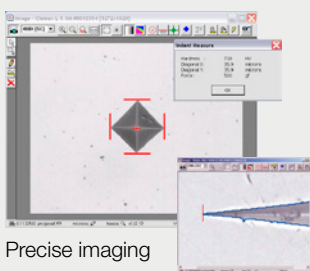


Precise imaging

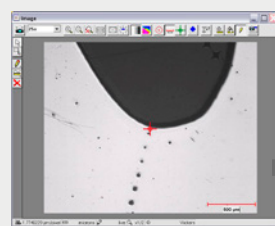

with 2.5 x objective lens

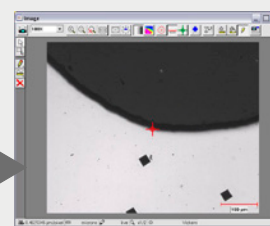



with 10 x objective lens

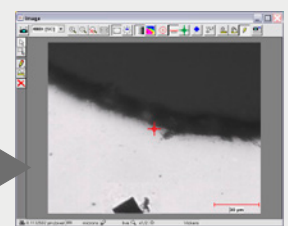

with 40 x objective lens

Step 4: Get results

Review results in graphical and/or tabular format. Export results to the spreadsheet application of your choice, or to **testXpert III** for creating and printing standard or customized reports.

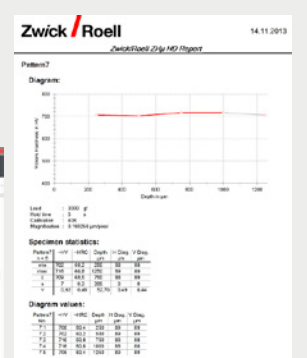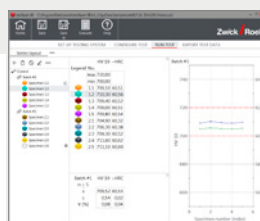

Product Information

ZHV30 Vickers Hardness Tester - from manual to fully automatic

Type	ZHV30-M manual	ZHV30-S semi-automatic	ZHV30-A fully automatic
Test loads	0.2 ... 30 kgf	0.2 ... 30 kgf	0.2 ... 30 kgf
Display	integrated display	PC monitor ⁽¹⁾	PC monitor ⁽¹⁾
Data entry	integrated keyboard	PC keyboard ⁽¹⁾	PC keyboard ⁽¹⁾
Focussing	via hand wheel	via hand wheel	motorized
Optics	Measuring microscope	USB camera with HD connection	USB camera with HD connection
HD-Software	-	ZHμ.HD-S: <ul style="list-style-type: none"> • Auto indentation measurement • Manual effective case depth determination 	ZHμ.HD-A: <ul style="list-style-type: none"> • Auto indentation measurement • Autom. effective case depth determination • Sample scanning and stitching capability
Test area (height x depth)	250 x 150 mm		
Dimensions (H x W x D)	850 x 300 x 650 mm		
Weight	50 kg		
Power supply	3 A single phase, 240/120 V switchable		
Inclusive instruction manual			

⁽¹⁾ PC, monitor and keyboard already included in scope of supply.

Accessories

Description	Item number
Vickers indenter	2111218
Knoop indenter	2111219
Ball indenter 1 mm Ø (UKAS certified)	2111264
Indenter holder (one required for each indenter)	2111217
Objective lenses 2.5-times	2111210
Objective lenses 5-times	2111211
Objective lenses 10-times	2111212
Objective lenses 20-times	2111213
Objective lenses 40-times	2111214
Objective lenses 50-times	2111215
Objective lenses 40-times Long working distance	2112291
Objective lenses 50-times Long working distance	2111259
Objective lens holder (one required for each objective lens)	2111209
70 mm diameter flat anvil	2111157
Hardness comparison plates on request, e.g. plate with 540 HV 1	

X-Y tables	Item number
Manual X-Y table 100 x 100 mm with 50 x 50 mm travel; with manual micrometers	2111222
Manual X-Y table 100 x 100 mm with 50 x 50 mm travel; with digital micrometers	2111221
Manual X-Y table 100 x 100 mm with 25 x 25 mm travel; with manual micrometers	2111224
Manual X-Y table 100 x 100 mm with 25 x 25 mm travel; with digital micrometers	2111223
Manual single axis table with 25 mm travel; with manual micrometer	2111226
Manual single axis table with 25 mm travel; with digital micrometer	2111225
Motorised X-Y table 185 x 135 mm and 100 x 60 mm travel	2111227
Motorised X-Y table 350 x 218 mm and 200 x 100 mm travel	2111229